


Our raceways are designed to facilitate the distribution, organization, and connection of voice, data, and video. They can also be used for low-voltage cabling applications in any networking environment. When wires can't be hidden behind a wall, these raceways provide cables with an aesthetically pleasant shelter, without having to modify the infrastructure of the facility. Flexible and robust PVC material helps keep important cables and connections protected. Available in carton box of 20 units.



AW130NXT30

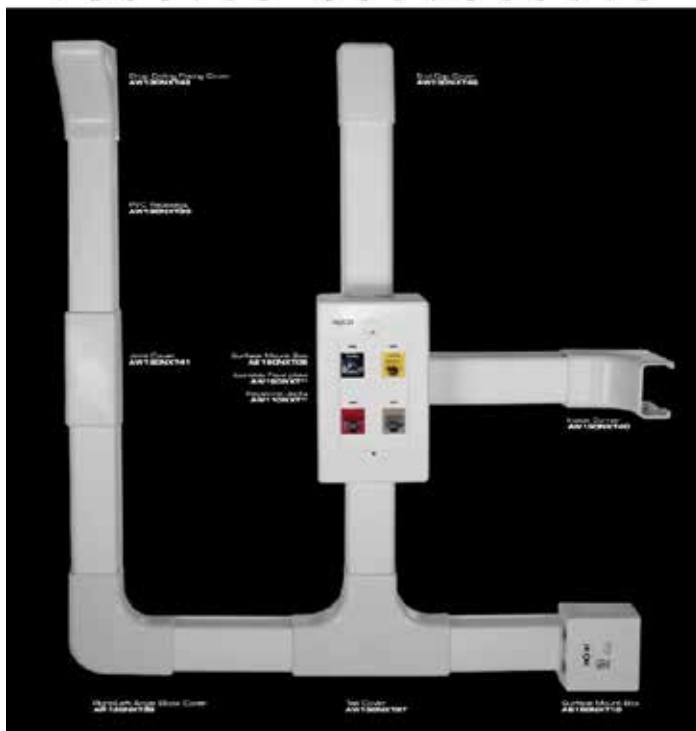

- Follows ANSI/TIA/EIA-568 C.2 manufacturing standards.
- For indoor use only, in environmentally controlled areas, may not be used outdoors, in industrial or harsh environments or in plenum spaces.
- Adhesive-backed for easy mounting
- Closes with a self-latching hinge
- Elegant design
- Made with fire retardant UL 94V-0 PVC

Product specifications	
Raceway characteristics	
Raceway color	Off-white
Dimensions	1 1/4" x 3/4" x 6ft
Mounting type	Wall mounted
Cover type	Self-hinged attached
Compound type	Polyvinyl chloride (PVC)
Halogen presence	Low
Fire retardant	UL 94V-0
Operating temperature	-20°C to 70°C
Protection grade	IP20
Other	Adhesive backed for easy mounting
RTI electrical	50
RTI mechanical impact	50
RTI mechanical strength	50
Dimensions	
External height	0,75in
Internal height	0,69in
External width	1,25in
Internal width	1,12in
Length	72in
Thickness	0,06in
Load Capacity (up to 60%)	Can hold up to 6 Cat.5e cables or 4 Cat.6 cables or 3 Cat.6a cables
Certifications and standards	
International standards	ANSI/TIA/EIA-568-C.2, ISO/IEC 11801 ANSI/TIA/EIA 569
UL certificate	QMFZ2 Component - plastic ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.
Miscellaneous	
MPN	AW130NXT30
UPC	798302033047
Labeling	NEXXT SOLUTIONS
Packaging	Carton box
Quantity per pack	20 units
Cuft	1,27 per 1 box of 20 units
Warranty	5-year limited warranty**

