

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A


B

C

D

E

F

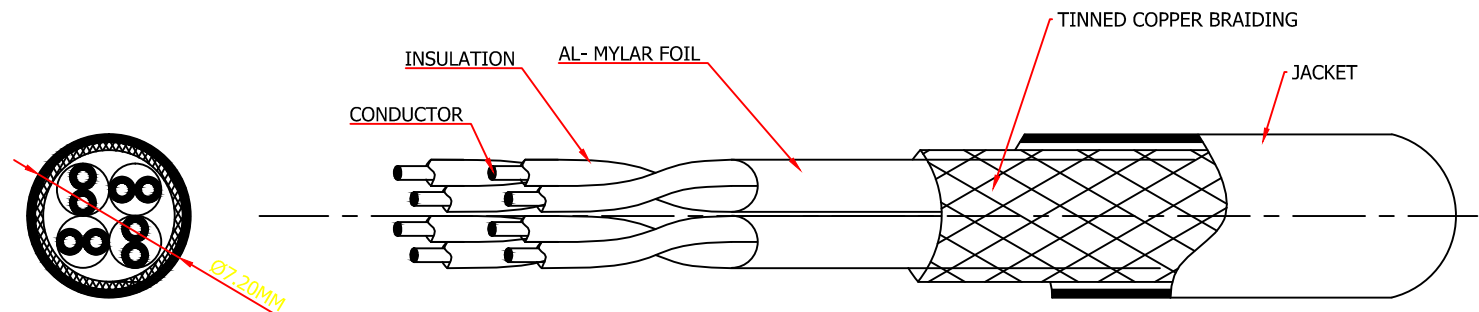


Product Specifications

Wire Characteristics
 Cable Type S/FTP "Shielded Foiled Twisted Pair"
 Number of Pairs 4
 Number of Wires 8
 Wire Type Solid Bare Copper
 Wire Gauge Size 23 AWG

Internal Characteristics
 Internal Jacket Material PE (3 dielectric layers)
 Average Min. Thickness 0.178 mm
 Min. Thickness 0.153 mm

External Characteristics
 External Jacket Material LSZH (Low Smoke Zero Halogen)
 Average Min. Thickness 0.585 mm
 Min. Thickness 0.458 mm
 Average Cable Diameter 7.2 mm ± 0.2mm
 Max. Strength 11 Kg
 Available Jacket Color Blue

Color Combinations
 Pair 1 Blue and White / Blue
 Pair 2 Orange and White / Orange
 Pair 3 Green and White / Green
 Pair 4 Brown and White / Brown
 Shield Type Braid wire
 (tinned copper conductor)
 and aluminum-mylar tape

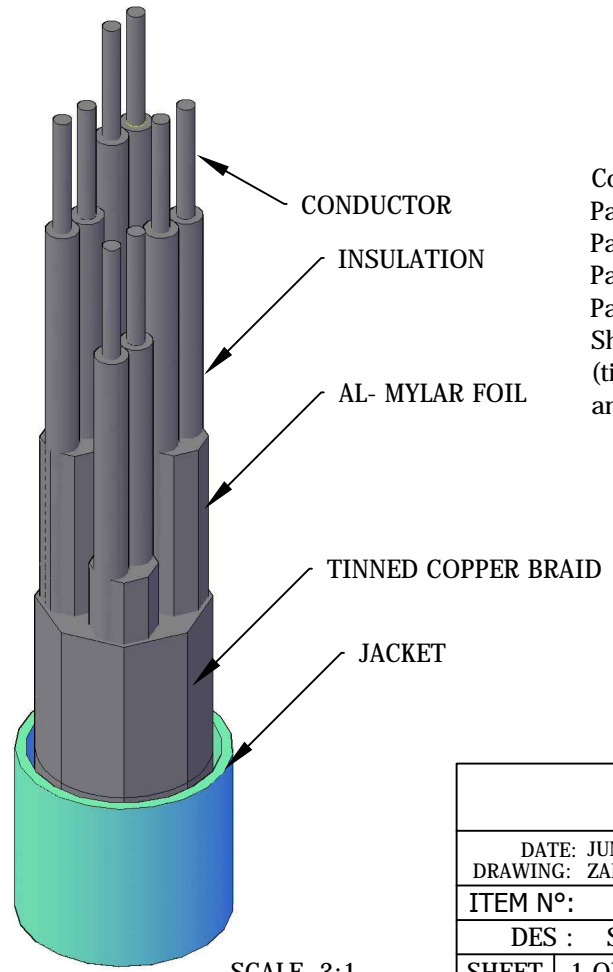

SCALE 3:1

NEXXT SOLUTIONS			
DATE: JUN 2014		DRAWING: ZARRAGA	
ITEM N°: NAB-UTP6ABL			
DES : S/FTP CABLE CAT6A 23AWG LSZH			
SHEET	1 OF 1	SCALE	3:1

1 2 3 4 5 6 7 8