



Our two-post 19-inch standard steel racks are designed for the mounting of equipment for cable installations, especially where easy access to cables is necessary. These racks provide more space to accommodate networking equipment and offer improved cable management. Built to EIA rack standards, it allows the quick attachment of equipment with threaded mounting holes, such as large modular network or voice switches, routers and other network devices in communications rooms.

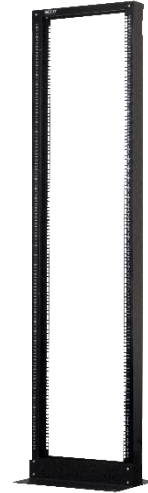

PCRORSKD30U2PBK

PCRORSKD45U2PBK



- Steel structure with modular and removable components.
- Available with 2-post that accommodate EIA industry-standard 19-inch panels.
- Follows ANSI/TIA/EIA-568 C.2 manufacturing standards and meets ANSI/EIA RS-310-C, D, E, F criteria.
- One layer of electrostatic coating protects it against humidity, rust, scratches, peeling, strong acid and alkaline erosion.
- Black epoxy-polyester hybrid powder paint.
- For indoor use only, in environmentally controlled areas, may not be used outdoors, in industrial or harsh environments or in plenum spaces.
- Other accessories available to meet any mounting need.
- Use with shelves or rails to support large modular network or voice switches, routers and network equipment
- Universal horizontal cable manager
- It accommodates vertical and horizontal power strips
- LCD monitor + shelf
- Keyboard + tray

Product specifications

Open rack characteristics		
Color	Black varnish paint (RAL 9005)	
Rack size	4ft	7ft
Effective U space	30U	45U
Mounting type	Floor mounted	
Pole quantity	2	
Holes type	Square	
Material (top)	SPCC, 2.0 mm thickness	
Material (frame)	SPCC, 2.0 mm thickness	
Material (base)	SPCC, 6.0 mm thickness	

Dimensions		
Height	60.17in / 1528.3mm	86.42in / 2195.05mm
External width	21.65in / 550mm	
Pole depth	3.17in / 80.6mm	
Bottom depth	14.96in / 380mm	
Load capacity	Can hold up to 2215lb / 1006kg	
Includes	<ul style="list-style-type: none"> • 2 Mounting frames • 2 top-mount • 2 bottom-mount • 12 M8 x L18.6mm screw set • 8 M5 x L12mm screw set • 1 Assembly Instructions 	

Certifications and standards		
International standards	UL 60950 or UL 60950-1 or UL 60950-21 ANSI/TIA/EIA 568.C.2 ANSI/EIA RS-310-D.	
UL certificate	IEC297-2; DIN41491: PART1; DIN41494: PART7; GB/T3047.2-92	
	UR E480900	

Miscellaneous		
MPN	PCRORSKD30U2PBK	PCRORSKD45U2PBK
UPC	798302033412	798302033429
Labeling	NEXXT SOLUTIONS	
Packaging	2 Carton Boxes. Frame, bolted assembly, ships unassembled	
Cuft	2.01	2.83
Warranty	5-years limited warranty**	

SPCC: Commercial grade, cold rolled steel sheets